


ND-AC275

ND-AC Series

275 W

The Reliable Solution

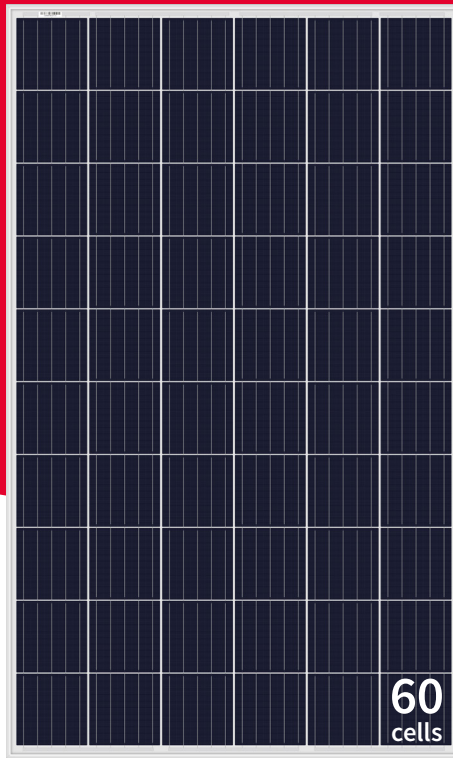

Powerful product features



Guaranteed positive power tolerance (0/+5%)



Polycrystalline silicon photovoltaic modules



Robust product design



Tested and certified
VDE, IEC/EN61215, IEC/EN61730



Safety class II / CE
Application class A



Fire rating class C



Portrait or landscape mounting



5 busbar technology
Improved reliability
Higher efficiency
Reduced series resistance

Your solar partner for life



60 years of solar expertise



Linear power output guarantee



Product guarantee



50 million PV modules installed



Local support team in Europe



Top PV brand award

Electrical data (STC)

ND-AC275

Maximum power	P_{max}	275	W_p
Open-circuit voltage	V_{oc}	39.08	V
Short-circuit current	I_{sc}	9.31	A
Voltage at point of maximum power	V_{mpp}	31.37	V
Current at point of maximum power	I_{mpp}	8.77	A
Module efficiency	η_m	16.8	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10% of the indicated values of I_{sc} , V_{oc} and 0 to +5% of P_{max} (power measurement tolerance ±3%).

Reduction of efficiency from an irradiance of 1,000 W/m² to 200 W/m² ($T_{module} = 25 °C$) is less than 3%.

Electrical data (NMOT)

ND-AC275

Maximum power	P_{max}	204.5	W_p
Open-circuit voltage	V_{oc}	36.19	V
Short-circuit current	I_{sc}	7.05	A
Voltage at point of maximum power	V_{mpp}	30.39	V
Current at point of maximum power	I_{mpp}	6.73	A

Electrical values measured under nominal module operating conditions: 800 W/m² irradiance, air temperature of 20 °C, wind speed of 1 m/s. NMOT: 42.5 °C (nominal module operating conditions).

Mechanical data

Length	1,650 mm
Width	992 mm
Depth	35 mm
Weight	18.5 kg

Temperature coefficient

P_{max}	-0.38%/°C
U_{oc}	-0.28%/°C
I_{sc}	0.039%/°C


Limit values

Maximum system voltage	1,000 VDC
Over-current protection	15 A
Temperature range	-40 to 85 °C
Max. mechanical load (snow/wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

Packaging data

Modules per pallet	30 pcs
Pallet size (L x W x H)	1.705 m x 1.055 m x 1.250 m
Pallet weight	approx. 600 kg

Dimensions (mm)

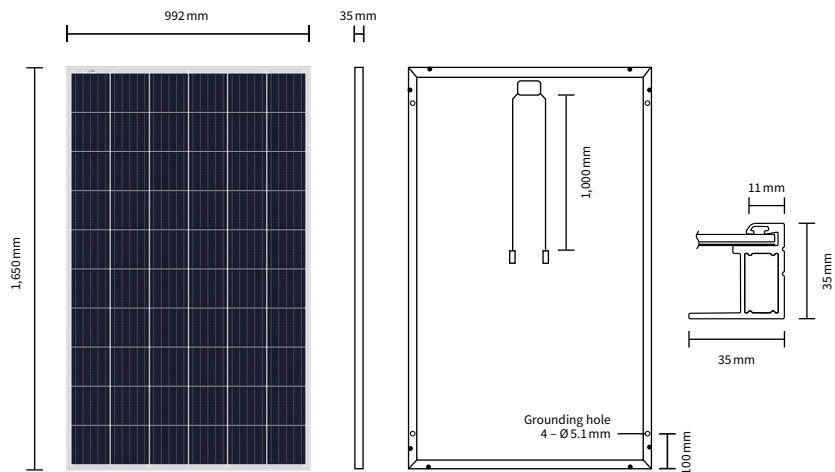

*Please refer to Sharp's installation manual for details.

General data

Cells	polycrystalline Si, 157 mm x 157 mm, 60 cells in series
Front glass	anti-reflective high transmissive low iron tempered glass, 3.2 mm
Frame	anodized aluminium alloy, silver
Connection box	IP67 rating, 3 bypass diodes
Cable	diameter 4.0 mm ² , length 1,000 mm
Connector	MC4 (Multi Contact, Stäubli Electrical Connectors AG)

Contact Sharp

SHARP Electronics GmbH
Energy Solutions
Nagelsweg 33 - 35
20097 Hamburg, Germany
T: +49 (0) 40 / 2376-2436
E: SolarInfo.Europe@sharp.eu

SHARP
Be Original.

Sharp.co.uk/energysolutions | #SharpBeOriginal